

Paged DryGuard



The mark of responsible forestry

ThickPly Nordic Pine plywood, surface treated with water-based coating to provide for water repellence (EN 927-5). Thanks to the special treatment the panel helps its users to save time during construction time. Its water-repellent surface reduces water absorption and does not hamper air permeability. The surface agent applied during manufacturing post processing slows down the rate of moisture penetration and helps maintain the rigidity and dimensional stability of the panel. In addition the coating protects the panel against fungal growth (EN 927-3).

KEY BENEFITS AND APPLICATIONS

- Main application areas include: construction, housing, campervan and mobile homes production, etc.
- Water repellent
- Dimensional stability and rigidity
- Air permeability
- Easy to machine and fasten
- Environmentally friendly coating (REACH compliant)
- CE2+ certified

STANDARD SIZES* [mm]

2500x1250
2440x1220


*Other formats available on request

NOMINAL THICKNESS WITH STANDARD DEVIATION, NUMBER OF PLYS, DENSITY AS PER EN 315, EN 323 & EN 324

Nominal Thickness (mm)*	Number of plies (pcs)	Standard Deviation (mm)		Weight (kg/m ²)	Density avg. (kg/m ³)
9	4	-0,7	+0,5	5,3	585**
12	5	-0,8	+0,6	7	
15	7	-0,8	+0,7	8,8	
18	8	-1,0	+0,7	10,5	
21	9	-1,0	+0,8	12,3	
24	10	-1,1	+0,9	14	
27	11	-1,7	+1,4	15,8	
30	12	-1,9	+1,5	17,6	

*Other thicknesses available upon request

**As measured at 8-12% moisture content

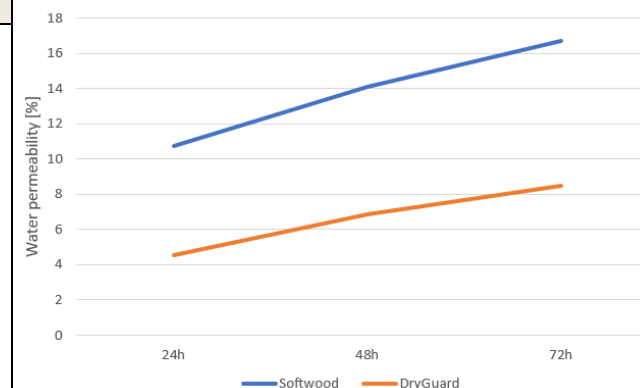

RELEASE OF FORMALDEHYDE (EN 717-1)

½ E1

BONDING QUALITY (EN 314-2)

Class 3

MACHINING

Edge machining, CNC machining and drilling on request

ADDITIONAL INFORMATION

1. General Terms of Sales available from www.skleikapaged.pl
2. Declaration of Performance available from www.skleikapaged.pl
3. Face veneer qualities according to EN 635-3.



Our product is made of renewable resource. Our products are characterized by low carbon footprint and are produced from certified wood, thus respecting the natural environment and the local community. The information contained in this document is intended as a guideline only and comes without warranty. We reserve the right to amend product specification sheets without notice.