

High quality flooring grade plywood in stock and ready for Nationwide delivery

Benefits

- Durable hardwood species which has a naturally high screw-holding ability, when compared to faster grown, lower density species. The density of PremierFloorPly is approximately 550-600kg/m³
- 6mm and 9mm are both 5ply construction, giving superior flatness and reliability as premium quality plywood
- Core quality, machine jointed for smooth and gap free core veneer
- Face quality is a one piece veneer, virtually defect free. The reverse face may have a small amount of well sanded filler flat to the face
- PremierFloorPly is produced in accordance with the Contract Flooring Association (CFA) guidelines and fully compliant with BS 8203: 2017 code of practise plywood specification.


Sizes

6mm (150 pieces per pallet) 2440 x 1220mm

9mm (100 pieces per pallet) 2440 x 1220mm

PremierFloorPly meets or exceeds the following requirements:

- BS-EN13986 EN314-2-3 glue bond class three
- BS EN315 Dimensional tolerances for plywood
- BS-EN13986 EN636-3 Requirements for plywood for exterior use
- BS EN635-1 Plywood classification by surface appearance
- BS EN350 Class 3 against fungal decay
- Glue bond - E1 Low Formaldehyde Phenolic resin is used in the bonding of the veneers of this plywood and conforms to EN314-2-3 of EN13986, the harmonised EU/UK standard on plywood production

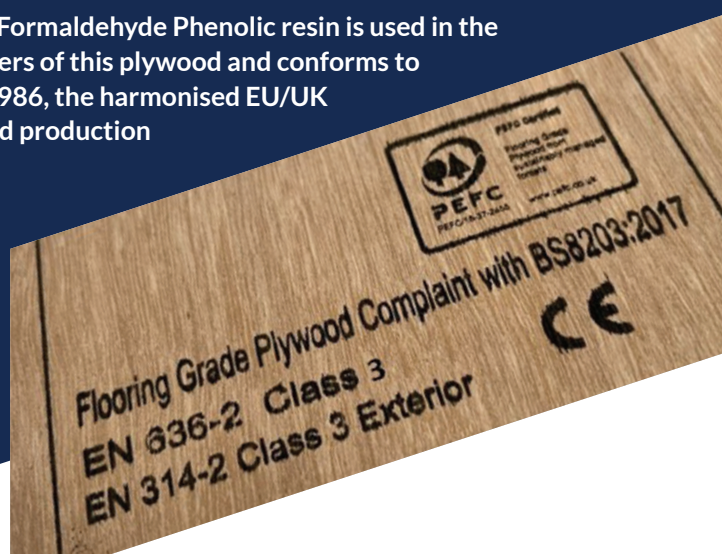

Call your regional sales office for a quote:

North & Midlands:

0121 265 4822

birminghamsales@premierforest.co.uk

Cirencester & Creeksea:

01959 562181

creeksea@premierforest.co.uk

West Wales:

01437 760 890

westsales@premierforest.co.uk

South Wales & West:

01633 254 422

sales@premierforest.co.uk

London & South East:

01895 253491

londonregionalsales@premierforest.co.uk

sales@premierforest.co.uk

www.premierforest.co.uk

Delivering your vision in timber

